


MS18



The MS18 is a specialty loudspeaker designed for output in the 35 to 140Hz range. While technically a subwoofer, it is best considered as a compact, versatile, bass reinforcement loudspeaker. The unit features a 1000 watt 18-inch woofer mounted in an easy-to-handle cube-format enclosure. The top surface of the MS18 contains three

cast-aluminum pole cups. These pole cups allow support for a number of MacPherson loudspeaker products. The Monolith's Inter mast system is directly compatible as are other pole-mounted loudspeakers such as the M2B and M2X.

- Features**
- High output in low-frequency range
 - Truck-pack dimensions
 - Portable and easy to set up
 - Allows direct support of Monolith

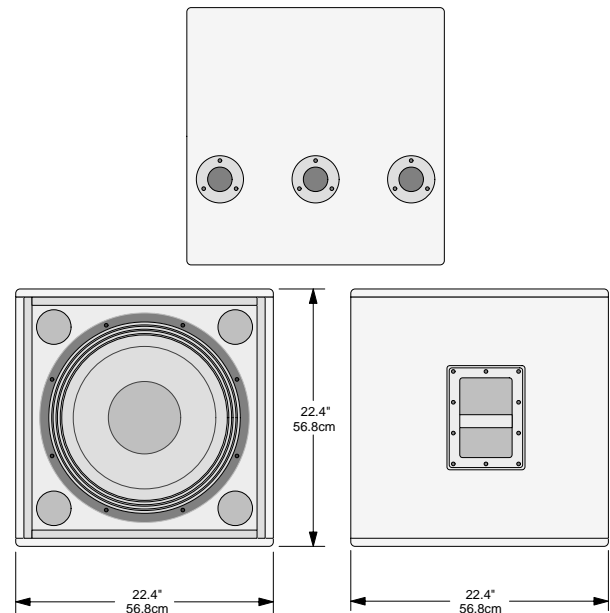

MS18 Specifications

Standard Configuration

MS18

Frequency Response

±4dB 35Hz to 140Hz

Nominal Impedance

8 ohms

Sensitivity

98dB; one watt, one meter

Maximum SPL

128dB

Recommended Amplifier Power

600 to 1000 watts RMS into 8 ohms

Recommended Crossover Points

20Hz to 30Hz high pass, 60Hz to 140Hz low pass (depending on application)

Connectors

Two, Neutrik NL4

Pole Mounting Support

Three, cast-aluminum mounting cups, accepts 1.5-inch diameter pole; directly compatible with MacPherson Monolith Inter mast system

Enclosure

Hardwood plywood, carpet or textured-paint finish, flush-mounted steel handles, powder-coated perforated steel grill with open-cell foam backing

Dimensions

22.4 inches high (56.8cm)

22.4 inches wide (56.8cm)

22.4 inches deep (56.8cm)

Weight

86.0 pounds (39.1kg)

Options

CCM Control Card for Crown P.I.P.[®]-compatible amplifiers

Warranty

Three years from date of original purchase

Contents subject to change without notice. Dimensions provided for general reference only.